

Internet

External Client


vext.domain.com/idp
vext.domain.com/dmzwebsec
vext.domain.com/websec

Proxy Actions

- Client Authentication
 - SSL Termination
 - Redirect based on path
 - Add Headers
 - Forward
- (see sample ns.conf)

DMZ

Content switch has NAT IP from firewall and directs to a LB vServer based on the path. The LB vServers do not need to have an addressable IP/Port. Each LB vServer is configured with a corresponding service which maps to the listening IP port on the VeridiumID HAProxy for the service.

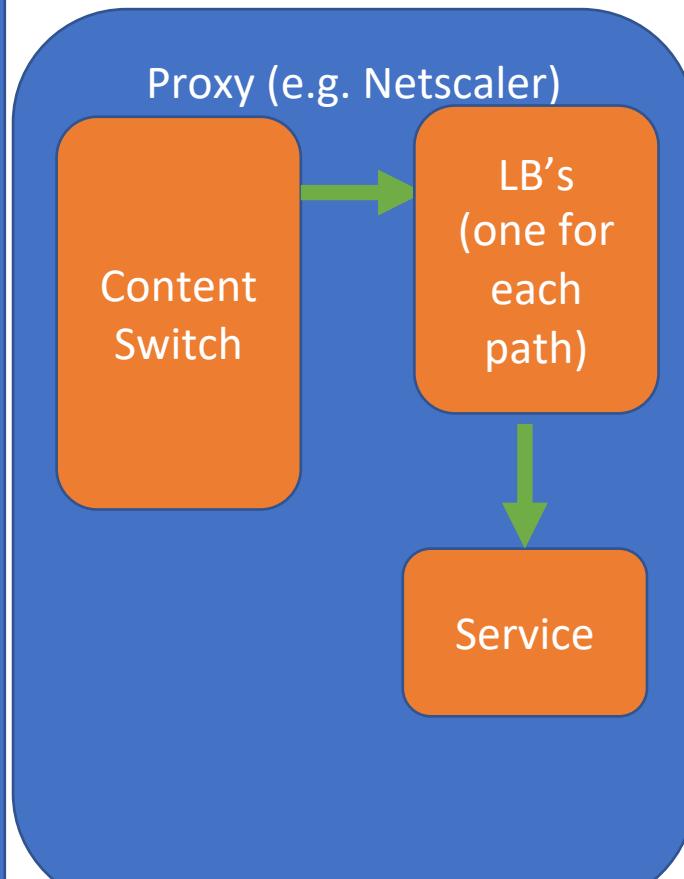

Internal Network

vint.domain.local:8944/idp
vint.domain.local :443/Websec

Internal Client

Client Authentication
SSL Termination

vint.domain.local:8644/idp
vint.domain.local:8448/dmzwebsec
vint.domain.local :8444/websec

HAProxy

Headers &
webapp redirect
(see haproxy.cfg)

Tomcat

Webapp
configuration
(See server.xml)